

Contact

Noble Inc.
 Phone: + 821 - 88 82 86 03
 Noble@Noble-Network.com

LANmark Industry DIN-Rail Outlets and boxes


LANmark Industry side cover DIN-Rail mount Category 6 grey

Nexans ref.: N20i.002

- For LANmark Industry DIN-Rail mount Cat 6 EVO (35mm)
- Easy installation, without tool
- One right and one left cover
- Suitable for one DIN-Rail mount or a row of DIN-Rail mounts

Description

LANmark Industry side covers for DIN-Rail Mount Cat 6 EVO. These covers can be slid on each sides of a single or a row of DIN-Rail Mount EVO Cat 6. No tools are required.

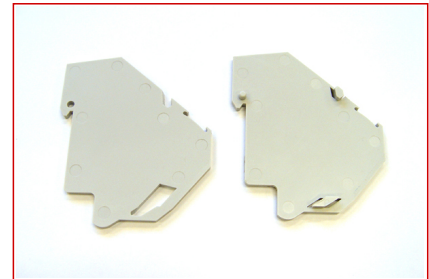

LANmark
Industry

Standards

International ISO/IEC 11801;ISO/IEC 24702



Mechanical resistance to impacts
Low



Electro magnetic interference resistance
No



Minimum operating temperature
0 °C



Maximum operating temperature
70 °C



Water proof
No



RoHS
RoHS conform
Yes

LANmark Industry DIN-Rail Outlets and boxes

LANmark Industry side cover DIN-Rail mount Category 6 grey

Nexans ref.: N20i.002

Characteristics

Construction characteristics	
Connector type	Snap-In
Screen	No
Cable entry	From the top or the bottom
Colour	Grey
Material	ABS
Dimensional characteristics	
Length cable end on inner side	0.0 mm
Number of cables	0
Height	77.8 mm
Width	3 mm
Depth	65 mm
Wall thickness	3 mm
Approximate weight per piece	0.02 kg
Dimensions of screw	N/A
Number of screws	0
Electrical characteristics	
Maximal operating frequency	0 MHz
Characteristic impedance	0 Ohm
Mechanical characteristics	
Mechanical resistance to impacts	Low
Usage characteristics	
Component function	Cabling and Connectivity solutions
Field of application	Industrial installations
Number of ports	0
Category	N/A
Electro magnetic interference resistance	No
Packaging	Plastic bag
Minimum operating temperature	0 °C
Maximum operating temperature	70 °C
Water proof	No
RoHS conform	Yes



Mechanical resistance to impacts
Low



Electro magnetic interference resistance
No



Minimum operating temperature
0 °C



Maximum operating temperature
70 °C



Water proof
No



RoHS conform
Yes