


## LANmark-OF Splicing Accessories with Heatshrink Protectors Preloaded Sliding Panel

### Description

#### Family Characteristics

- Family of patch panel accessories for termination of a cable when using fusion splicing techniques.
- The cassette protects the fusion splices and holds them in position.
- The splice cassette can retain up to 12 fusion splices.
- Four trays can be stacked inside the patch panels resulting in a maximum capacity of 48 fusion splices in a patch panel.
- Splice cassettes are fixed to each other at the back of the cassettes with the provided hinges. This feature facilitates the inspection after installation since the cassettes can be lifted and tilted.
- The large cassettes facilitates 2 rings of routing: an inner ring for the fibres of the pigtails and an outer ring for the fibres of the cable.
- Splicing with heat shrink protectors can be used for both tight buffer and loose tube cables, i.e. heat shrink protectors are compatible with both 250 and 900 um coated fibres.
- Splicing with heat shrink protectors can be used for both maxistrap and tight buffer pigtails.
- LANmark-OF Bend Limiting Tube (N890.145) can be used to split up fibres of loose tube cable into different splice cassettes.
- These splice cassettes can be installed in the LANmark-OF and LANsense-OF sliding preloaded patch panels (N439.2B\* and N883.2B\*).

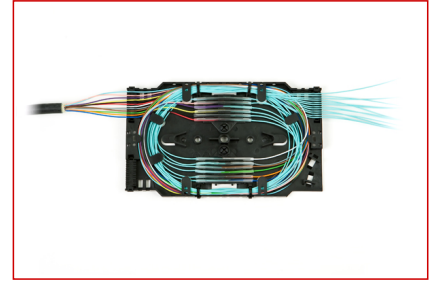

## LANmark-OF

### Standards

**International** ISO/IEC 11801:2002/  
Amd 1:2008/Cor 1:2008

## LANmark-OF Splicing Accessories with Heatshrink Protectors Preloaded Sliding Panel

**N890.090: LANmark-OF Splice Cassette 12 Heat Shrink Protection Sliding Preloaded Panel**

- Splice cassette for management of splices with heat shrink protectors.
- Provides support for 2\*6 heat shrink splice protectors.
- Designed for use with both loose tube and tight buffer cables, i.e. 250 and 900 um coated fibres.
- Designed for use with both maxistrip and tight buffer pigtails.



**N890.021: LANmark-OF Fusion Splice Heat Shrink protectors (45mm)**

- LANmark OF-accessories to complete the splicing system with heat shrink protectors
- 100 pieces per bag
- Length: 45mm
- Compatible with tight buffer or loose tube cables, i.e. 250 and 900 um coated fibres.
- Compatible with tight buffer and maxistrip pigtails
- Designed for Nexans' splice cassette for 12 heat shrink fusion splice protectors (N890.090)



**N890.092: LANmark-OF Cover Splice Cassette Sliding Preloaded Panel**

- LANmark-OF accessories to complete splice cassette system.
- LANmark-OF splice cassette cover compatible with N890.091 and N890.092.
- When the splice cassettes are stacked only the top splice cassette requires a cover.

**LANmark-OF Splicing Accessories with Heatshrink Protectors  
Preloaded Sliding Panel**

